



ENERGY EFFICIENCY

Thermal Transmission Coefficient

$U_w \geq 0.83$ (W/m²K)

Please consult typology, dimensions and glazing

ACCOUSTIC INSULATION

Maximum glazing: 2.13"

Maximum acoustic insulation: $R_w = 45$ dB

CATEGORIES ACHIEVED AT TEST CENTRE

Protection against atmospheric agents

Air permeability (EN 12207):

Class 4

Water tightness (EN 12208):

Class E1200

Wind resistance (EN 12210):

Class C5

Reference test 48.43" x 58.27" / 2 sashes.

SECTIONS	Classic frame 3.94" Modern frame 2.95" Sash 3.27"
PROFILE THICKNESS	Window 0.059"
MAXIMUM DIMENSIONS	Width (L) = 59.06" Height (H) = 102.36"
MAXIMUM WEIGHT/SASH	160 Kg

Please consult regarding maximum weight and dimensions according to types

GASKETS	EPDM triple gasket
EXTRUSION ALLOY	6063 T-5
CERTIFICATES SKG	
Certification	

POLYAMIDE STRIP LENGTH Polyamide 6.6 reinforced with 25% fiberglass: 1.26"-1.54"

OPENING POSSIBILITIES

INWARD	side hung, tilt & turn, tilt.
OUTWARD	side hung

FINISHES

Colour powder coating (RAL, mottled, rough...)

According to Qualicoat >60 microns

Wood effect powder coating

According to Qualideco standard

Anodized


According to Ewwa Euras

Standard Class 15

Optionally Class 20 and 25

Optionally bicoloured

Classic

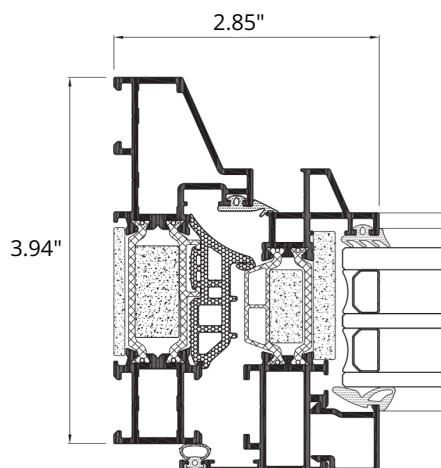

Modern

