


**TU.MT.BALISTONE ROYALBLUE**

|           |              |
|-----------|--------------|
| FORMAT    | 7x28 C.G.    |
| THICKNESS | 8.500        |
| PRODUCT   | PORCELANICO  |
| TYPE      | GL Esmaltado |
| GROUP     | Bla          |

APPLICABLE STANDARD EN 14411 ANNEX G

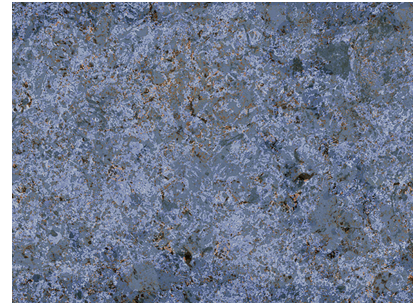

| TESTS |                                                                             | RESULTS                                  |                            |
|-------|-----------------------------------------------------------------------------|------------------------------------------|----------------------------|
|       | UNE-EN ISO 10545-2 DIMENSIONAL FEATURES                                     | COMPLIES WITH THE STANDARD               |                            |
|       | UNE-EN ISO 10545-3 WATER ABSORPTION                                         | < = 0,5 %                                |                            |
|       | UNE-EN ISO 10545-4 MODULUS OF RUPTURE                                       | BREAKING STRENGTH                        | >700 N                     |
|       |                                                                             | BENDING STRENGTH                         | 35-45 N/mm2                |
|       | UNE-EN ISO 10545-6 RESISTANCE TO DEEP ABRASION (MM3)                        | NOT APPLY                                |                            |
|       | UNE-EN ISO 10545-7 RESISTANCE TO SURFACE ABRASION                           | -                                        |                            |
|       | UNE-EN ISO 10545-8 LINEAR THERMAL EXPANSION                                 | <7,0 x 10 <sup>-6</sup> °C <sup>-1</sup> |                            |
|       | UNE-EN ISO 10545-9 THERMAL SHOCK RESISTANCE                                 | RESISTS                                  |                            |
|       | UNE-EN ISO 10545-11 CRAZING RESISTANCE                                      | RESISTS                                  |                            |
|       | UNE-EN ISO 10545-12 FROST RESISTANCE                                        | RESISTS                                  |                            |
|       | UNE-EN ISO 10545-13 CHEMICAL RESISTANCE                                     | AMMONIUM CHLORIDE 100 G/L                | A                          |
|       |                                                                             | SODIUM HYPOCHLORITE 20 MG/L              | A                          |
|       |                                                                             | HYDROCHLORIC ACID 3%                     | COMPLIES WITH THE STANDARD |
|       |                                                                             | CITRIC ACID 100 G/L                      | COMPLIES WITH THE STANDARD |
|       |                                                                             | POTASSIUM HYDROXYDE 30 G/L               | COMPLIES WITH THE STANDARD |
|       | UNE-EN ISO 10545-14 STAIN RESISTANCE                                        | GREEN AGENT IN LIGHT OIL                 | 5                          |
|       |                                                                             | IODINE SOLUTION IN ALCOHOL               | 5                          |
|       |                                                                             | OLIVE OIL                                | 5                          |
|       | UNE 41901:2017 EX SLIP RESISTANCE (PENDULUM)                                | -                                        |                            |
|       | DIN 51130 CRITICAL ANGLE OF SLIP (INCLINED PLATFORM)                        | -                                        |                            |
|       | DIN 51097 CRITICAL ANGLE OF SLIP. WET-LOADED BAREFOOT AREAS                 | -                                        |                            |
|       | (PTV) DRY CLASSIFICATION ACCORDING TO PENDULUM TEST VALUES (PTV) DRY        | -                                        |                            |
|       | BS7976 (PTV) WET CLASSIFICATION ACCORDING TO PENDULUM TEST VALUES (PTV) WET | -                                        |                            |
|       | ANSI A326.3 DYNAMIC COEFFICIENT OF FRICTION (DCOF) OF RIGID FLOORS.         | -                                        |                            |