



UNIT 66 MODULAR FACADE

TBB

ENERGY EFFICIENCY

Thermal Transmission Coefficient

UCW $\geq 0,6$ (W/mK)

Please consult typology, dimensions and glazing

ACCOUSTIC INSULATION

Maximum glazing: 2.28"

CATEGORIES ACHIEVED AT TEST CENTRE

Protection against atmospheric agents

Air permeability (EN 12152):

Water tightness (EN 12154):

Wind resistance (EN 13116):

Impact resistance (EN):

Reference test AEV 131.59" x 127.05"

Class AE

Class RE1200

PASSED (Design loading 2000 Pa-Security loading 3000 Pa)

I5 / E5

SECTIONS	2.60" - 2.99"
PROFILE THICKNESS	Mullion 0.083" Transom 0.079"
MAXIMUM DIMENSIONS	Width max. (L) = 59.06" Height min. (H) = 141.73"
MAXIMUM WEIGHT	350 Kg

Please consult maximum dimensions according to types.

EXTRUSION ALLOY 6063 T-5 / 6063 T-6 / 6005 T-6
POLYAMIDE STRIP LENGTH
0.98" - 1.57"
GASKETS
EPDM gasket

OPENING POSSIBILITIES

Top hung
Hidden parallel opening

FINISHES

Colour powder coating (RAL, mottled, rough...)

According to Qualicoat > 60 microns

Wood effect powder coating

According to Qualideco standard


Anodized

According to Ewwa Euras

Standard Class 15

Optionally Class 20 and 25

Standard version

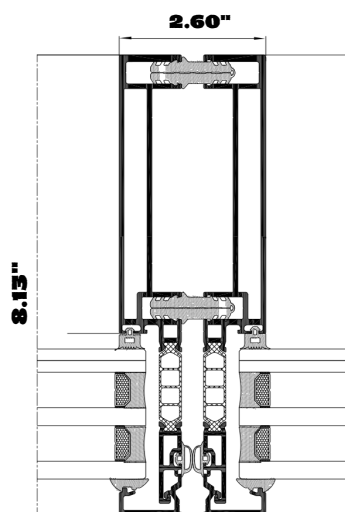

High insulation version

