

series
Lucia



PW



BRUSHED
NICKEL

BL



MATT BLACK
PVD




certified
by

77..250

Single handle lavatory faucet.
 11 43/64" overall height.
 6" 41/64" spout reach.
 2 13/32" maximum deck thickness.
 Pop-up drain included.

Flow Rate: 1.2 GPM @ 60 PSI

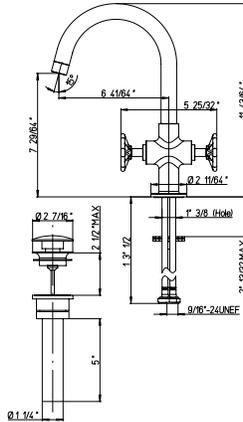


replacement cartridge
 53CC58BF16123S left
 53CC58BF16123D right

77..214

8" centers widespread
 lavatory faucet.
 8 1/5" overall height.
 6 6/39" spout reach. Spout rotates.
 1 7/32" maximum deck thickness.
 Pop-up drain included.

Flow Rate: 1.2 GPM @ 60 PSI




replacement cartridge
 53CC58BF16123S left
 53CC58BF16123D right

77..207

8" centers wall mount
 lavatory faucet.
 2 2/5" spout reach.

Flow Rate: 1.2 GPM @ 60 PSI

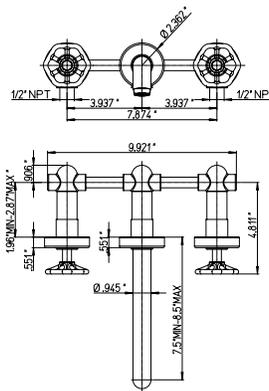


replacement cartridge
 53CC58BF16123S left
 53CC58BF16123D right

77..102

Roman tub.
 8 15/16" spout height.
 6" spout reach.
 2 1/16" maximum deck thickness.

Flow Rate: 7.2 GPM @ 60 PSI

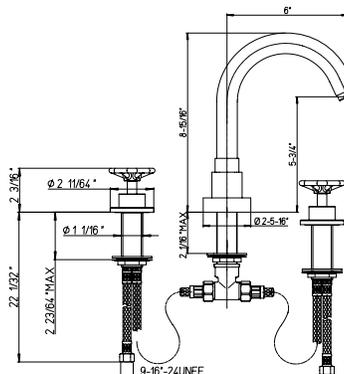


replacement cartridge
 53CC58BF16123S left
 53CC58BF16123D right

77..689

Exposed shower column.
24" brass slide bar kit.
Includes: Handshower,
Wall mount bracket & supply elbow,
78" flexible hose.


Flow Rate: 1.8 GPM @ 60 PSI MAX

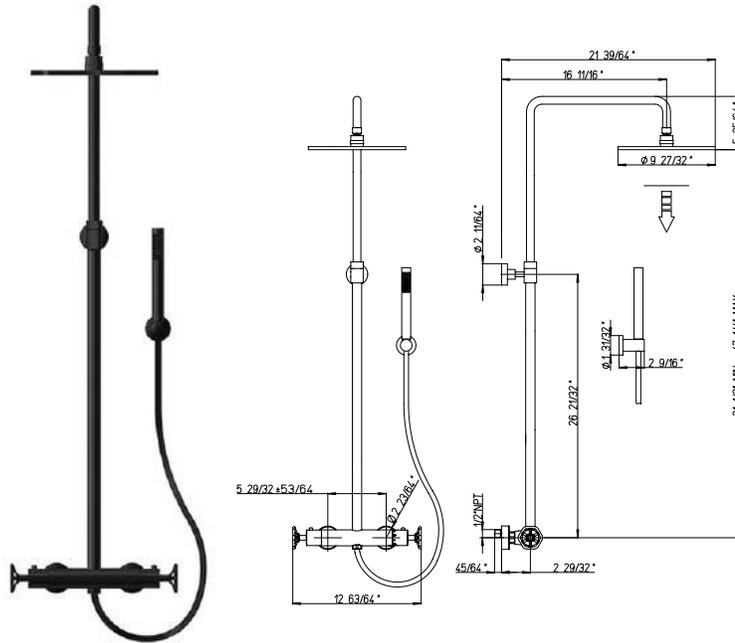

VALVE 691

Thermostatic Valve
2 ways diverter cartridge
1/2" inch inlet connections


Flows 5.5 GPM @ 60 PSI



VALVE 690

Thermostatic Valve
with 3/4" volume control
1/2" inch inlet connections

Flows 7.1 GPM @ 60 PSI




VALVE 400

1/2" Volume Control
1/2" inch inlet connections
Flows 12.5 GPM @ 60 PSI

VALVE 402


3/4" Volume Control
3/4" inch inlet connections
Flows 15.0 GPM @ 60 PSI



VALVE 425

3 ways Diverter Rough-in Valve
1/2" inch inlet connections


Flows 9.7 GPM @ 60 PSI



77..690

Thermostatic valve with 3/4" ceramic disc volume control.

NEEDS ROUGH VALVE 690

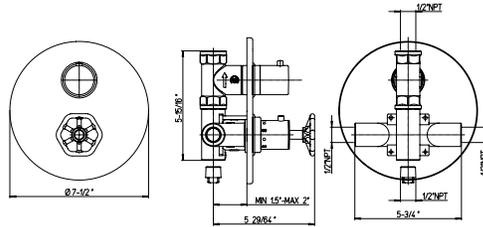


replacement ceramic disc valve
53CC5813/4S25
replacement cartridge
2TCC959

77..691

Thermostatic valve with 2 way diverter volume control.

NEEDS ROUGH VALVE 691

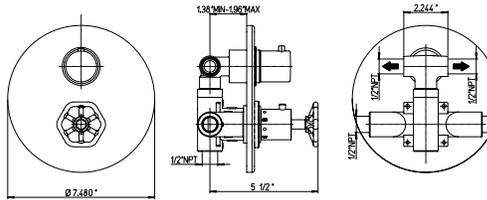


replacement ceramic disc valve
53CC956DEV35
replacement cartridge
2TCC959

77..400

Volume control trim kit.

NEEDS ROUGH VALVE 400 OR 402

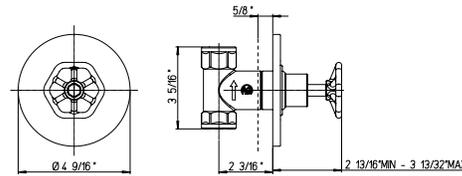


replacement ceramic disc valve
49**5813/4D

77..425

3 way diverter. 3/4" ceramic disc valve. 1/2" inlet connections.


NEEDS ROUGH VALVE 425

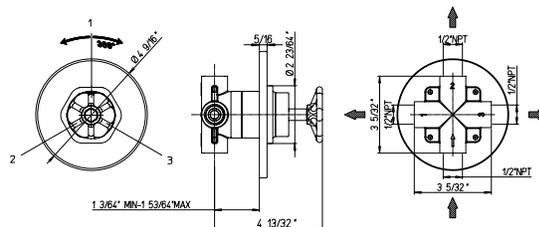


replacement diverter cartridge
53CC956DRG40

KIT 2


- Thermostatic tub & shower KIT including:
- 8" Brass round rain shower head - Anti Limestone
 - 12" Brass round wall mounted arm & flange
 - Trim 691 with thermostatic valve & 2 way diverter volume control
 - Rough in valve 691
 - 5 3/4" Brass tub spout
 - 1/2" NPT inlet connections

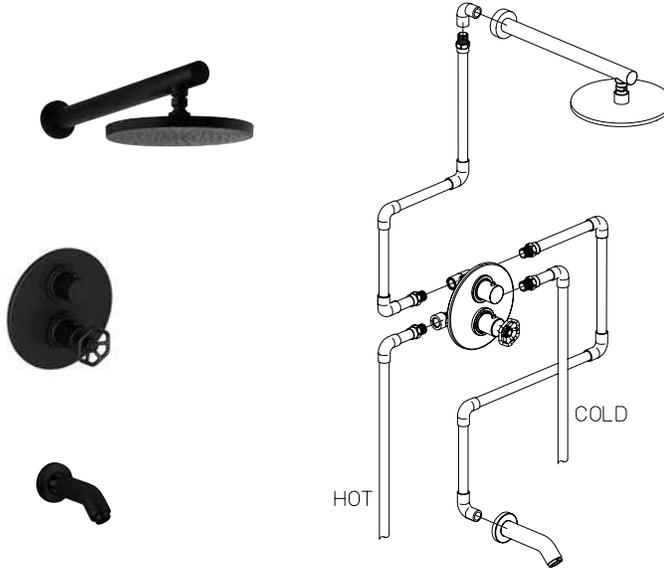
KIT 4

- Thermostatic shower KIT including:
- 8" Brass round rain shower head - Anti Limestone
 - 12" Brass round wall mounted arm & flange
 - Trim 690 with thermostatic valve & 3/4" ceramic disc volume control
 - Rough in valve 690
 - 1/2" inlet connections

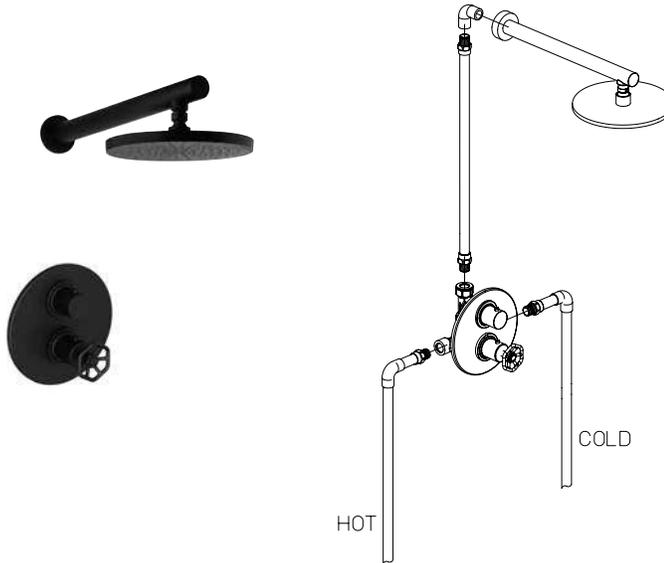

KIT 6

- Thermostatic hand shower KIT including:
- 8" Brass round rain shower head - Anti Limestone
 - 12" Brass round wall mounted arm & flange
 - Trim 691 with thermostatic valve & 2 way diverter volume control
 - Rough in valve 691
 - Round wall mounted brass handshower set including 1-jet round handshower, wall mounted bracket & supply elbow + flange, 78" flexible hose
 - 1/2" inlet connections

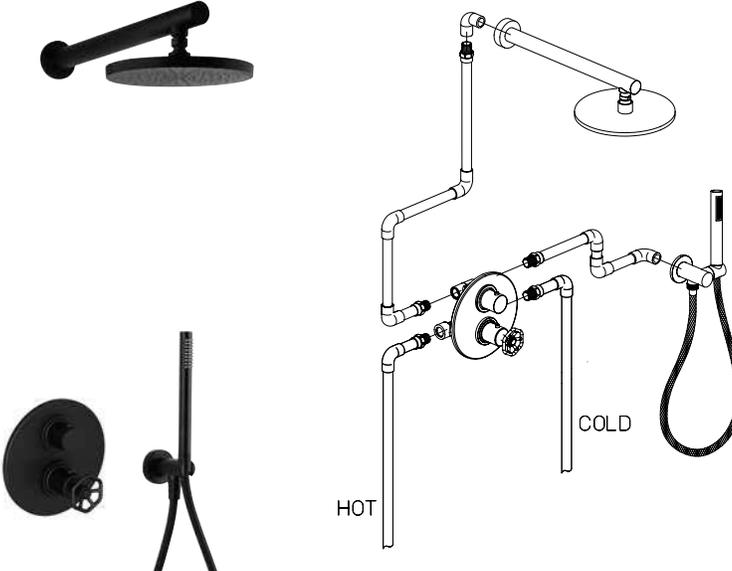


RD..74512

12" wallmount shower arm with strengthened fixing.




RD..74516

16" wallmount shower arm with strengthened fixing.




RD..74406

6" Ceiling mount shower arm with strengthened fixing.



RD..74412


12" Ceiling mount shower arm with strengthened fixing.



78..75908

8" round brass shower head.
Anti-limestone.
1/2" connections.

Flow Rate: 1.8 GPM @ 60 PSI MAX




LUCIA

78..75910

10" round brass shower head.
Anti-limestone.
1/2" connections.


Flow Rate: 1.8 GPM @ 60 PSI MAX



78..75912

12 round brass shower head.
Anti-limestone.
1/2" connections.


Flow Rate: 1.8 GPM @ 60 PSI MAX



RD..129

24" brass slide bar kit.
Includes: Handshower,
Wall mount bracket & supply elbow,
78" flexible hose.


Flow Rate: 1.8 GPM @ 60 PSI MAX

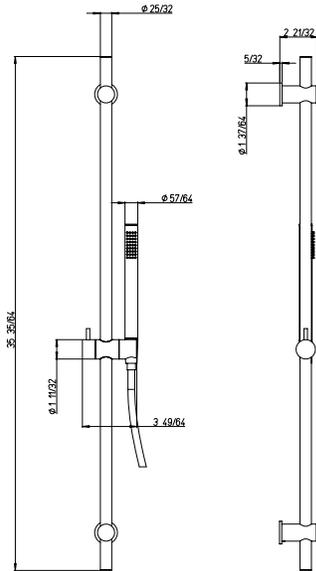

RD..440

Wallmounted brass handshower kit.
1-jet hand shower.
Wall mount bracket & supply elbow.
78" flexible hose.

Flow Rate: 1.8 GPM @ 60 PSI MAX



50..162


78" metal shower hose.



RD..503

Round brass drop elbow.

1/2" NPT Connection



RD..721


Round brass body tile spray.

Directional Body Spray.

30° Rotation.

1/2" Female NPT Connection.

Flow Rate: 1.5 GPM @ 60 PSI MAX



86..721


Round brass body spray.

Directional Body Spray.

30° Rotation.

1/2" Female NPT Connection.


Flow Rate: 1.5 GPM @ 60 PSI MAX

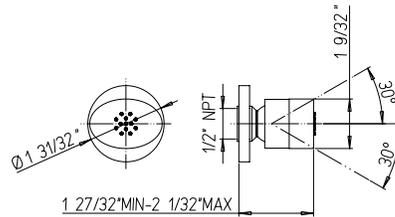

78..430

Brass tub spout wall mount.

5 3/4" Brass tub spout.



RD..945

Push down pop up drain.

