series Ornellaia










CR PW OK/BL

KIT 2


- Thermostatic tub & shower KIT including:
- 8" Brass Round rain shower
- head Anti Limestone
- 12" Brass Round wall mounted arm & flange
- Trim 691 with thermostatic valve &
- 2 way diverter volume control
- 2 way diverter volume
 Rough in valve 691
- Rough in valve 691 - 8" Brass tub spout
- 1/2" inlet connections

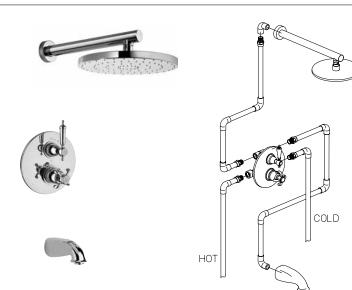

KIT 4

Thermostatic shower KIT including:

- 8" Brass round rain
- shower head Anti Limestone
- 12" Brass round wall
- mounted arm & flange - Trim 690 with thermostatic valve &
- 3/4" ceramic disc volume control
- Rough in valve 690
- 1/2" inlet connections

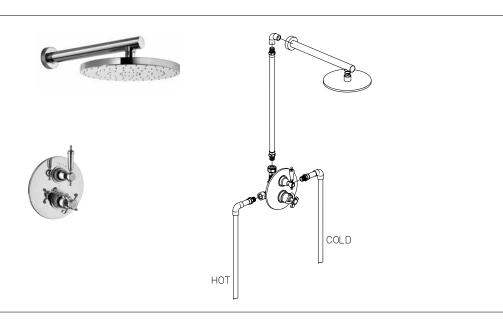

GO.

36 (

HOT

KIT 6

Thermostatic hand shower KIT including:

- 8" Brass round rain shower
- head Anti Limestone
- 12" Brass round wall
- mounted arm & flange
- Trim 691 with thermostatic valve
- & 2 way diverter volume control
- Rough in valve 691
- Round wall mounted brass
- handshower set including 1-jet round handshower, wall
- mounted bracket & supply elbow + flange, 78" flexible hose
- 1/2" inlet connections

COLD



RD..74512 12" wallmount shower arm with strengthened fixing. 13/16 / 15 3/4 2 23/64 1 3/16 19/32 07 RD..74516 16" wallmount shower arm with strengthened fixing. 11 13/16/15 3/4 1 3/16 5 Z 23/64 13/64 19/32 1 3/16 à 61/2"NPT 55/64 <u>G1/2</u> RD..74406 6" Ceiling mount shower arm with strengthened fixing. G1/2"NPT <u>3 5/32 ·</u> 13/16 <u>61/2"NPT</u> RD..74412 <u>61/2"NPT</u> 12" Ceiling mount shower arm 3 5/32 with strengthened fixing. 13/16 G1/2"NPT RD..75908 Extraslim 8" showerhead only. Round design. 1/2" connections. Flow Rate: 1.8 GPM @ 60 PSI MAX 2 3/64 F




RD..75910 P.II Extraslim 10" showerhead only. Round design. ½" connections. Flow Rate: 1.8 GPM @ 60 PSI MAX G1/2 2 3/64 Ŗ RD..75912 316 Extraslim 12" showerhead only. Round design. 1/2" connections. Flow Rate: 1.8 GPM @ 60 PSI MAX -^{pv2} 78..75908 G 1/2" 5/16 8" round brass shower head. Anti-limestone. Ø 7 7/8 1/2" connections. Flow Rate: 1.8 GPM @ 60 PSI MAX 78..75910 G 1/2* P 10" round brass shower head. Anti-limestone. Ø 9" 13/10 1/2" connections. Flow Rate: 1.8 GPM @ 60 PSI MAX 78..75912 G 1/2" Fi -12 round brass shower head. Anti-limestone. Ø 11" 13/16 1/2" connections. Flow Rate: 1.8 GPM @ 60 PSI MAX



RD..129

24" brass slide bar kit. Includes: Handshower, Wall mount bracket & supply elbow, 78" flexible hose.


Flow Rate: 1.8 GPM @ 60 PSI MAX

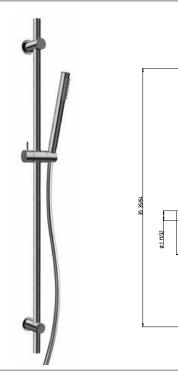

RD..440

Wallmounted brass handshower kit. 1-jet hand shower. Wall mount bracket & supply elbow. 78" flexible hose.

Flow Rate: 1.8 GPM @ 60 PSI MAX



¢ 25/32

¢ 57/6

50..162

78" metal shower hose.



RD..503

Round brass drop elbow.

1/2" NPT Connection





21/32

p1 37/64

CR

OK / BL

PW




RD..721

Round brass body tile spray. Directional Body Spray. 30° Rotation. ½" Female NPT Connection.

Flow Rate: 1.5 GPM @ 60 PSI MAX






86..721

Round brass body spray. Directional Body Spray 30° Rotation ½" Female NPT Connection

Flow Rate: 1.5 GPM @ 60 PSI MAX





87..430

Brass tub spout wall mount.

